



1. Typical kit contents



2. Fit the rungs in a side rail; align the flat side of the rung with the long dimension. Use a rubber mallet to tap the rungs in place if is necessary

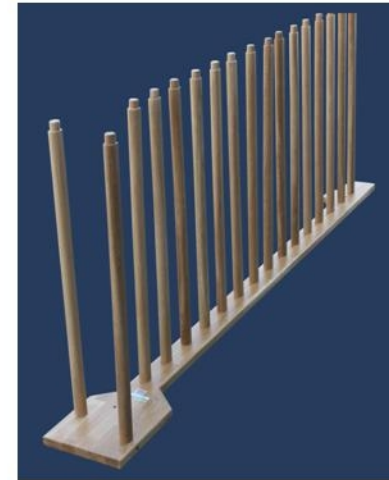

3. Fit the second rail. Start at one end, and progressively engage rungs until all are seated

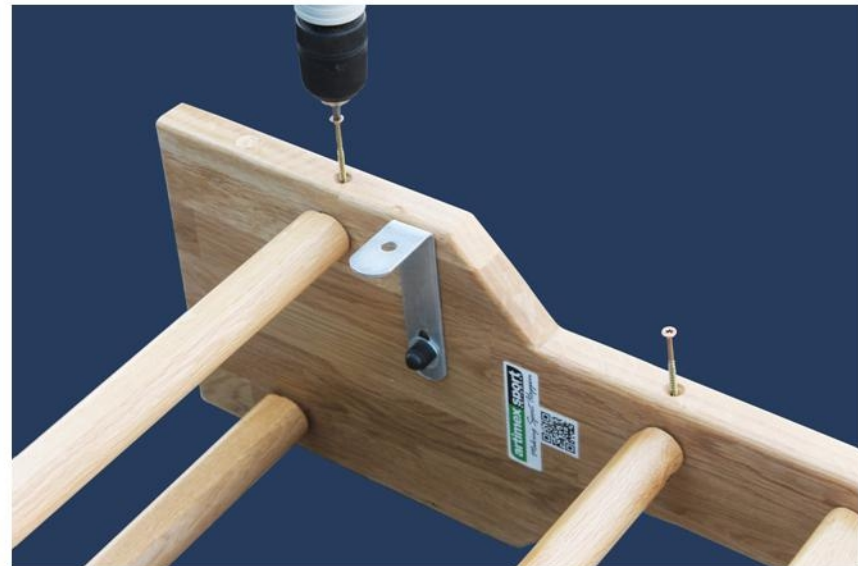

4. Screw the rungs into a place with the short screws.